





an  company

WELCOME  
TO EOTECH

## A LEADER IN IMAGING SYSTEMS

**EOTECH® the future of optics,  
thermal and night vision technology**

EOTECH® is a leader in imaging innovation. With a full portfolio of products, including holographic weapon sights, precision rifle scopes, thermal and night vision systems and laser aiming solutions, EOTECH is a complete system supplier. The bold brand mark represents EOTECH's proud heritage and signifies a strong, modern forward-thinking attitude. EOTECH is dedicated to providing rugged, reliable and innovative products that offer a true advantage to all who use them.

## CONTENTS

---

04 /

### NEW PRODUCTS 2018

EXPS2 & XPS2 (GREEN RETICLE) / VUDU 5-25x50FFP

06 /

### HWS INFORMATION

12 /

### NIGHT VISION-COMPATIBLE

EXPS3 / 558 / 552 / XPS3

16 /

### NON-NIGHT VISION-COMPATIBLE

EXPS2 (GREEN RETICLE) / EXPS2 / 518 / 300 BLK /  
XPS2 / XPS2 (GREEN RETICLE) / 512 XBOW / 512

22 /

### HWS MAGNIFIERS

HHS GREEN / HHS I / HHS II / HHS III / G33

28 /

### RETICLE INFORMATION

32 /

### THERMAL & NIGHT VISION INFORMATION

33 /

### THERMAL VISION

LWTS

34 /

### NIGHT VISION

M914 / M2124 / M2124 LR

36 /

### VUDU PRECISION RIFLE SCOPES

PRS FEATURES / 1-6x24FFP / 2.5-10x44FFP / 3.5-18x50FFP / 3.5-18x50SFP /  
5-25x50FFP / 8-32x50SFP / ACCESSORIES

# NEW PRODUCTS

## 2018

EOTECHINC.COM

HWS® NON-NIGHT VISION-COMPATIBLE


MODEL  
**EXPS2™**  
GREEN RETICLE

See page 18 for specifications.



Achieve faster target acquisition with the new easy-to-see Green reticle that is approximately 6X easier to see than red in daytime. The EXPS2-GRN also maximizes rail space with its compact size and allows for co-witnessing of iron sights. It has convenient side buttons to add a magnifier and features an adjustable, locking, quick-detach lever for easy attachment and removal.

MSRP \$699



RETICLE



HWS® NON-NIGHT VISION-COMPATIBLE


MODEL  
**XPS2™**  
GREEN RETICLE

See page 20 for specifications.



Now with an easy-to-see Green reticle, the XPS is the shortest and lightest HWS sight yet. The Green reticle is approximately 6X easier to see than red in daytime which can lead to faster target acquisition. With a single 123 lithium battery configuration, the XPS provides additional rail space, leaving more room for rear iron sights or magnifiers. Also offering water-resistant capability up to 10 feet, the XPS2™ is a great compact option for your platform.

MSRP \$665



RETICLE



PRECISION RIFLE SCOPE


MODEL  
**vudu 5-25x50FFP**

See page 43 for specifications.




The New Vudu 5-25 x 50 mm is ideal for the short platform rifles. At approximately 11.2 inches in length, the 5-25x is one of the shortest first focal plane rifle scopes on the market. The elevation turret includes a push/pull locking system and EOTECH's EZ Chek Zero Stop allowing for quick adjustments and return to zero. One unique advantage of the short design is that it provides the ability to attach either a clip-on night vision or thermal device in front of the scope and still allow the user to make adjustments to the device without leaving the scope.


MSRP starts at \$2,099



HORUS H59



MD3@25x



MD3@5x

Parallax Adjustment



First Focal Plane	Objective Lens Diameter — 50 mm	Single-Piece 34 mm tube	Illuminated Reticle	XC™ High-Density Glass	0.1 MRAD Adjustments	Sunshade included	Parallax Adjustment
-------------------	---------------------------------	-------------------------	---------------------	------------------------	----------------------	-------------------	---------------------

These commodities are controlled under the Export Administration Regulations (EAR) and may not be exported without proper authorization by the U.S. Department of Commerce.

# HWS®

## HOLOGRAPHIC WEAPON SIGHTS

### NEW FEATURES AND PERFORMANCE

In 2018, significant improvements have been made to the holographic weapon sight.

### THE EOTECH HWS PRESTIGE WARRANTY

New 10-Year limited warranty on all HWS and Magnifiers.  
*See page 45 for more details.*

### IMPROVED BATTERY LIFE

Increase of more than 250% in Lithium AA batteries and more than 350% in Alkaline AA's. | Increase of more than 60% on 123 Lithium batteries.  
*See products for battery life details.*

### GREEN RETICLE

EXPS2 and XPS2 models now offered with an easy-to-see Green reticle.  
*See page 18 and 20 for more details.*

### WHY A HOLOGRAPHIC SIGHT?

EOTECH® Holographic Weapon Sights (HWS®) are among the fastest target acquisition optics in the world. Situational awareness is provided through the heads-up display that supports engagement with two eyes open. The system optimizes the operator's peripheral vision capacity, and even with the sight window shattered or partially obstructed by mud, snow or rain, the sight will still function effectively.

FAST	AWARENESS	DURABLE	STEALTH	FLEXIBILITY
EXTREMELY FAST Target Acquisition Sight System	TWO EYES OPEN ENGAGEMENT Reduces blind spots & tunnel vision for maximum awareness	READY FOR ANYTHING In theaters of operation all over the world	OPERATOR IS UNDETECTABLE In virtually any environment, including night vision	RETICLE ADJUSTABILITY Adapts to various lighting environments and situations

### FAST TARGET ACQUISITION

The aiming reticle is one of the greatest advantages of the HWS®. Rather than a standard single dot reticle, the HWS incorporates a circle reticle for fast target acquisition with an incredibly small aiming dot for more precise shot placement.



WHAT MAKES AN EOTECH HWS® BETTER THAN A RED DOT SIGHT?

### EOTECH HWS®

#### RETICLE | FIELD-OF-VIEW

68 MOA ring allows for faster target acquisition, while the center dot (1 MOA - smallest in the industry) provides better range precision.

The rectangular heads-up display provides an increased field-of-view (FOV) over rounded windows and micro sights.

### TYPICAL RED DOT

#### RETICLE | FIELD-OF-VIEW

Dot is typically 2 to 4 MOA so the dot is large enough to find. At 200 yards, this size dot covers 4 to 8 inches of the target compared to 2 inches for the HWS.

Round windows provide less FOV with their tubular construction, creating both blind spots and constricted vision or "tunnel effects" when the red dot is rotated or off axis.



EOTECH® 2018



1X at 100 yards

3X at 100 yards

1X at 100 yards

3X at 100 yards

#### MAGNIFICATION


The aiming dot does not expand when viewed with typical magnification. In tandem with a 3X magnifier, the dot size does not increase noticeably, while the target is enlarged 3 times, offering much greater precision.

#### MAGNIFICATION

When an LED dot is viewed through a 3X magnifier, the dot grows by the same factor as the target. Although the shooter will see the target 3X larger, the dot will cover the same target area, providing no additional precision.

## HWS® PERFORMANCE CHARACTERISTICS

FOR MOST MODELS

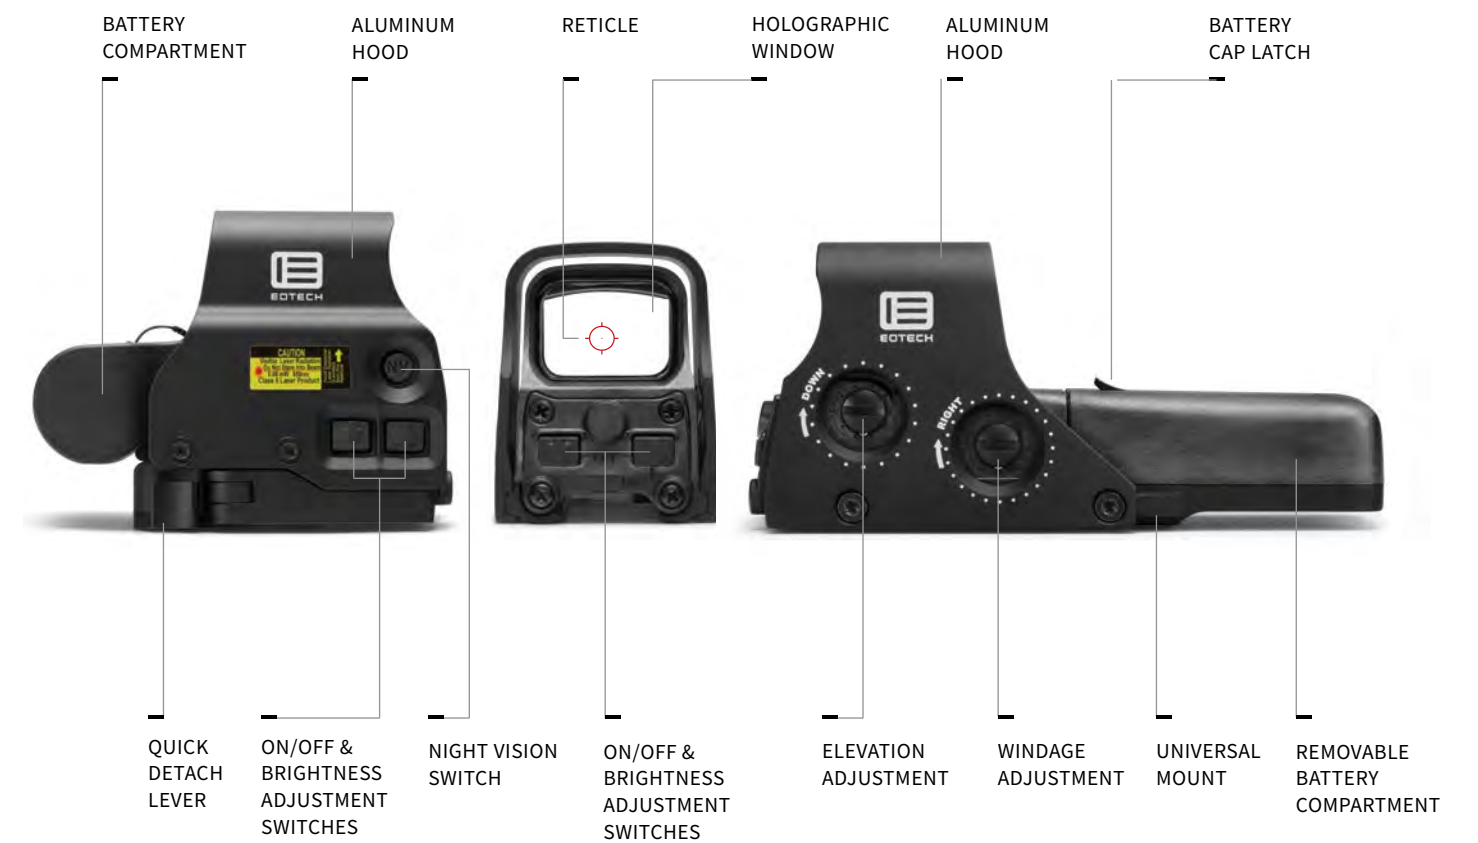

### ELECTRICAL

**BRIGHTNESS SETTINGS**  
20 manual daylight settings with scrolling feature (optional 10 settings for night vision use)

**AUTO BATTERY CHECK INDICATOR**  
Reticle flashes on startup when battery is low

**AUTO SHUTDOWN**  
User-controlled; shuts down at 4 or 8 hours

### OPERATION

**OPTICS**  
Holographic

**MAGNIFICATION**  
1X

**EYE RELIEF**  
Unlimited

**SEALING**  
Internally fog-resistant optics

**ADJUSTMENT RANGE (PER CLICK)**  
Average 0.5 MOA (1/2" at 100 yds.) when zeroing

**ADJUSTMENT RANGE**  
Minimum +/- 40 MOA travel

### HEADS-UP DISPLAY

**OPTICAL SURFACES**  
Anti-reflective coating on external surfaces

**WINDOW DIMENSIONS**  
1.20" x 0.85" (30 mm x 23 mm)

**FRONT WINDOW MATERIAL**  
1/8" solid glass

**REAR WINDOW MATERIAL**  
3/16" thick glass laminate

**FIELD-OF-VIEW (100 YDS.)**  
30 yds. (28 m) at a 3" (76.2 mm) eye relief

EOTECH®

HWS®


NIGHT VISION-COMPATIBLE




MODEL  
**EXPS3™**



ORDER CODE  
EXPS3-0  
EXPS3-2  
EXPS3-4\*  
EXPS3-0 TAN  
EXPS3-2 TAN



0



2



4

CHOICE OF  
THREE RETICLES

The EXPS3™ is an excellent choice not only for hunters, but for professionals too. The EXPS3 offers true two eyes open shooting for fast target acquisition, night vision-compatible settings, and a 7 mm raised base for lower iron sight access. It also has side buttons and an adjustable, locking, quick-detach lever for easy installation and removal.

\*Aiming dots on the 4-dot reticle may not be distinguishable without magnification.



MSRP \$699


L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
3.8" x 2.3" x 2.9" (96.5 x 58.4 x 73.7 mm)	11.2 oz (317 g)	To 33 ft. (10 m)	Black, Tan	Quick-detach lever fits both 1" Weaver and MIL-STD-1913 rail	30 settings (10 for NV)	1 x 123 lithium battery	1,000 continuous hrs at nominal setting 12	68 MOA ring w/ single 1 MOA dot, 68 MOA ring w/ (2) 1 MOA dots, or 68 MOA ring w/ (4) 1 MOA dots

MODEL  
**558™**

ORDER CODE  
558.A65



Perfect for anyone that doesn't like to sacrifice. The 558™ is compatible with all Gen I-III night vision devices and features an adjustable, locking, quick-detach mount that offers instant removal.



0

RETICLE



MSRP \$655


L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
5.6" x 2.2" x 2.9" (142.3 x 55.9 x 73.7 mm)	13.8 oz (391.2 g)	To 33 ft. (10 m)	Black	1" Weaver or MIL-STD-1913 rail	30 settings (10 for NV)	2 x AA battery (supports lithium, alkaline or rechargeable)	up to 2,500 continuous hrs (lithium) at nominal setting 12; 2,200 continuous hrs w/AA alkaline date battery life numbers	68 MOA ring w/ single 1 MOA dot

MODEL  
**552™**

ORDER CODE  
552.A65  
552.XR308



The Model 552™ is the most popular night vision-compatible holographic weapon sight offered. The AA battery model has been used around the world and is compatible on both 1" Weaver and MIL-STD-1913 rails.




0



XR308

CHOICE OF  
TWO RETICLES



MSRP \$589


L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
5.6" x 2.0" x 2.5" (143 x 51 x 64 mm)	11.5 oz (325 g)	To 33 ft. (10 m)	Black	1" Weaver or MIL-STD-1913 rail	30 settings (10 for NV)	2 x AA battery (supports lithium, alkaline or rechargeable)	up to 2,500 continuous hrs (lithium) at nominal setting 12; 2,200 continuous hrs w/AA alkaline date battery life numbers	XR308, 68 MOA ring w/ single 1 MOA dot

MODEL  
**XPS3™**


ORDER CODE  
XPS3-0  
XPS3-2



The shortest and lightest HWS night vision-compatible sight yet. With a single 123 lithium battery configuration, the XPS provides additional rail space, leaving more room for rear iron sights, magnifiers or night vision mount. Also, offering water-resistant capability up to 33 feet, the XPS3™ is a great compact option for your platform.



0



2

CHOICE OF  
THREE RETICLES



MSRP \$567

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
3.8" x 2.1" x 2.5" (97 x 54 x 64 mm)	9.0 oz (255 g)	To 33 ft. (10 m)	Black	1" Weaver or MIL-STD-1913 rail	30 settings (10 for NV)	1 x 123 lithium battery	1,000 continuous hrs at nominal setting 12	68 MOA ring w/ single 1 MOA dot, 68 MOA ring w/ (2) 1 MOA dots



HWS / NON-NIGHT VISION-COMPATIBLE

EOTECH®

HWS®

NON-NIGHT VISION-COMPATIBLE

EOTECH® 2018


MODEL  
**EXPS2™**  
GREEN RETICLE

ORDER CODE  
EXPS2-0GRN

**NEW**  
2018



Achieve faster target acquisition with the new easy-to-see Green reticle that is approximately 6X easier to see than red in daytime. The EXPS2-GRN also maximizes rail space with its compact size and allows for co-witnessing of iron sights. It has convenient side buttons to add a magnifier and features an adjustable, locking, quick-detach lever for easy attachment and removal.



0  
RETICLE



MSRP \$699

BLACK


L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
3.8" x 2.3" x 2.9" (96.5 x 58.4 x 73.7 mm)	11.2 oz (317.5 g)	To 10 ft. (3 m)	Black	Quick-detach lever fits both 1" Weaver and MIL-STD-1913 rail	20 settings	1 x 123 lithium battery	600 continuous hrs at nominal setting 12	68 MOA ring w/ single 1 MOA dot

MODEL  
**EXPS2™**

ORDER CODE  
EXPS2-0  
EXPS2-2



The Model EXPS2™ maximizes rail space with its compact size and allows for co-witnessing of iron sights. It has convenient side buttons to add a magnifier and features an adjustable, locking, quick-detach lever for easy attachment and removal.



0



2

CHOICE OF TWO RETICLES

MSRP \$599

BLACK


L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
3.8" x 2.3" x 2.9" (96.5 x 58.4 x 73.7 mm)	11.2 oz (317.5 g)	To 10 ft. (3 m)	Black	Quick-detach lever fits both 1" Weaver and MIL-STD-1913 rail	20 settings	1 x 123 lithium battery	1,000 continuous hrs at nominal setting 12	68 MOA ring w/ single 1 MOA dot, 68 MOA ring w/ (2) 1 MOA dots

MODEL  
**518™**


ORDER CODE  
518.A65  
518-2



The best just got better. Get all of the features found in EOTECH's top sight, the EXPS, but with easy to find AA batteries. The 518™ has buttons on the side that allow the user to position it close to the magnifier to reduce rail space.



0



2

CHOICE OF TWO RETICLES

MSRP \$555

BLACK



L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
5.6" x 2.2" x 2.9" (142.3 x 55.9 x 73.7 mm)	13.8 oz (391.2 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	20 settings	2 x AA battery (supports lithium, alkaline or rechargeable)	up to 2,500 continuous hrs (lithium) at nominal setting 12; 2,200 continuous hrs w/AA alkaline date battery life numbers	68 MOA ring w/ single 1 MOA dot, 68 MOA ring w/ (2) 1 MOA dots

MODEL  
**300™ BLK**

ORDER CODE  
XPS2-300



Designed with tactical shooters in mind, the XPS2-300 offers a two-dot ballistic drop reticle that allows the shooter to zero either Subsonic or Supersonic .300 Blackout rounds in the same reticle pattern. Offered in the XPS2 platform, it features a 300™ BLK custom laser etching on the hood and water-resistant capability up to 10 feet, functionality and durability are at the forefront.

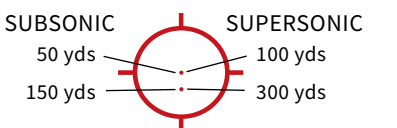

2

RETICLE

MSRP \$555

BLACK

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
3.8" x 2.1" x 2.5" (97 x 54 x 64 mm)	9.0 oz (255 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	20 settings	1 x 123 lithium battery	1,000 continuous hrs at nominal setting 12	68 MOA ring w/ (2) 1 MOA dots

**NEW**  
2018

NEW MODEL  
**XPS2™**  
GREEN RETICLE

ORDER CODE  
XPS2-0GRN



Now with an easy-to-see Green reticle, the XPS is the shortest and lightest HWS sight yet. The Green reticle is approximately 6X easier to see than red in daytime which can lead to faster target acquisition. With a single 123 lithium battery configuration, the XPS provides additional rail space, leaving more room for rear iron sights or magnifiers. Also offering water-resistant capability up to 10 feet, the XPS2™ is a great compact option for your platform.



0  
RETICLE



MSRP \$665

BLACK


L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
3.8" x 2.1" x 2.5" (97 x 54 x 64 mm)	9.0 oz (255 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	20 settings	1 x 123 lithium battery	600 continuous hrs at nominal setting 12	68 MOA ring w/ single 1 MOA dot

MODEL  
**XPS2™**


ORDER CODE  
XPS2-0  
XPS2-1  
XPS2-2  
XPS2-FN  
XPS2-SAGE



The shortest and lightest HWS sight yet. With a single 123 lithium battery configuration, the XPS provides additional rail space, leaving more room for rear iron sights or magnifiers. Also offering water-resistant capability up to 10 feet, the XPS2™ is a great compact option for your platform.



FN



SAGE

CHOICE OF FIVE RETICLES

MSRP \$555

BLACK


L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
3.8" x 2.1" x 2.5" (97 x 54 x 64 mm)	9.0 oz (255 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	20 settings	1 x 123 lithium battery	1,000 continuous hrs at nominal setting 12	68 MOA ring w/ single 1 MOA dot, Single 1 MOA aiming dot, 68 MOA ring w/ (2) 1 MOA dots FN Less Lethal and SAGE Less Lethal

MODEL  
**512™ XBOW**


ORDER CODE  
512.XBOW



Designed with Crossbow hunters in mind, the Model 512™ Crossbow sight utilizes the unique properties of holography to create optimal range scaling data in a heads-up display. A pre-calculated ranging scale (in yards) is projected on the target and measures the back to the belly of a typical mature whitetail deer (18"). Simply position the base of the scale on the belly (see diagram on the right) and read from where the back intersects the scale — it's that easy. With the integral ranging pattern, there is no unnecessary body movement or added noise while in the stand. Both range information and aiming reticle are displayed within the same sight picture to quickly line up your shot.



DEER RANGEFINDER  
(RANGE AT 30 YARDS)



XBOW RETICLE

MSRP \$499

BLACK

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
5.6" x 2.0" x 2.5" (143 x 51 x 64 mm)	11.5 oz (325 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	20 settings	2 x AA battery (supports lithium, alkaline or rechargeable)	up to 2,500 continuous hrs (lithium) at nominal setting 12; 2,200 continuous hrs w/AA alkaline date battery life numbers	X-Bow Reticle w/ range assist

MODEL  
**512™**

ORDER CODE  
512.A65



Perfect for anyone who wants fast target acquisition, reliability and durability without night vision capability, the Model 512™ is the most popular HWS in the line.



0  
RETICLE

MSRP \$479

BLACK

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
5.6" x 2.0" x 2.5" (143 x 54 x 64 mm)	11.5 oz (325 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	20 settings	2 x AA battery (supports lithium, alkaline or rechargeable)	up to 2,500 continuous hrs (lithium) at nominal setting 12; 2,200 continuous hrs w/AA alkaline date battery life numbers	68 MOA ring w/ single 1 MOA dot



MAGNIFIERS

EOTECH®

# MAGNIFIERS

EOTECH® 2018

MODEL

# HHS GREEN™


EXPS2-0 GREEN RETICLE WITH A G33 MAGNIFIER

ORDER CODE  
HHS GRN

**NEW**  
2018



Regardless of the scenario, the Holographic Hybrid Sight Green (HHS GREEN™), featuring an EXPS2-0GRN with a G33™ magnifier, provides an amazing advantage when transitioning from close quarter to long-range shooting. Instant transition is achieved through a quick Switch-To-Side (STS) mount that offers a simple, quick disengagement of the magnifier. The Green reticle is approximately 6X easier to see than red in daytime which can lead to faster target acquisition.



0

RETICLE



MSRP \$1,239


BLACK

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	MAGNIFICATION FIXED	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
7.7" x 2.3" x 3.3" (195.6 x 59 x 83.9 mm)	22.4 oz (635.1 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	3X	20 settings	1 x 123 lithium battery	600 continuous hrs at nominal setting 12	68 MOA ring w/ single 1 MOA dot

## MAGNIFIER FEATURES

FOR G33

Due to today's ever-changing scenarios, the need to transition quickly between Close Quarters Combat (CQB) and medium-range target identification and engagement is vital. Maintaining a precise shot at both distances is a must. The ability to transition between the two distances almost instantly and still maintain weapon accuracy is easily achieved with our compact, fixed 3X magnifier.

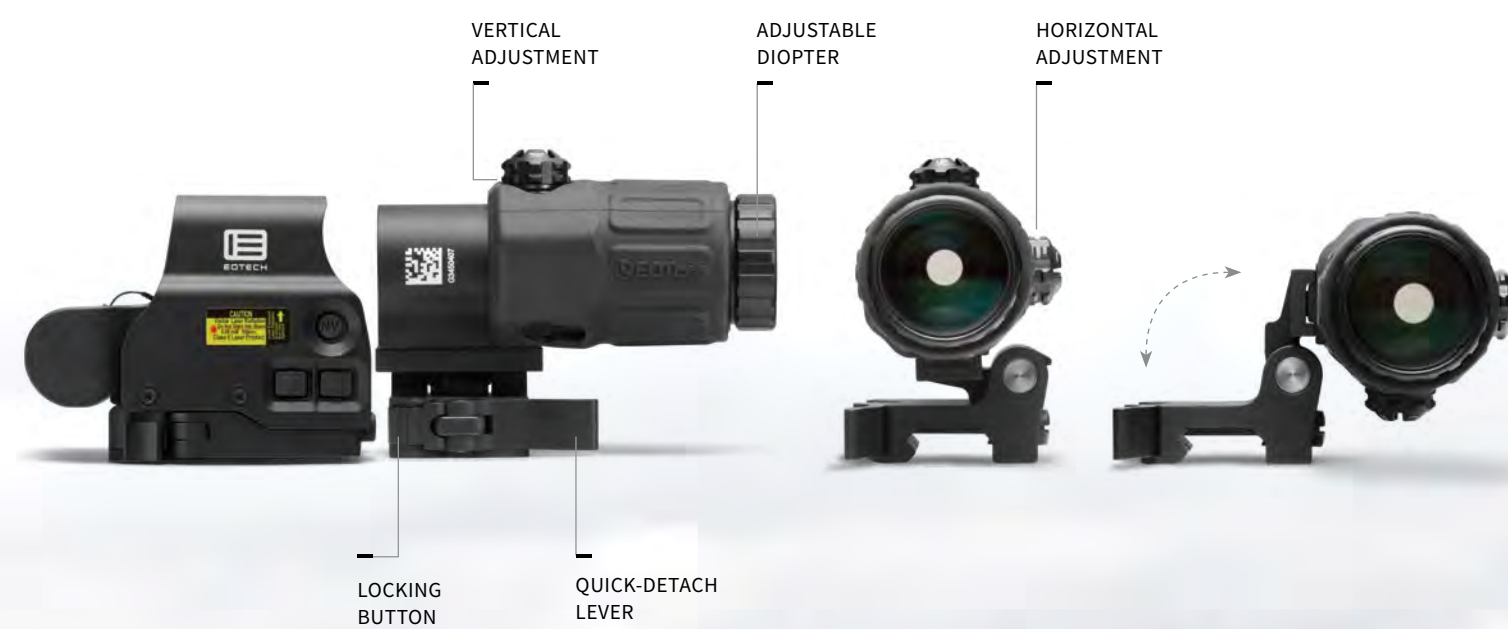

MAGNIFIERS



1X at 100 yards

3X at 100 yards

## BASIC OPERATION

The G33™ magnifier is designed to be used behind an EOTECH Holographic Weapon Sight (HWS®). The magnifier can be mounted directly behind the HWS. Simply switch the magnifier out of the way for quick 1X targeting. When used with HWS Models 518, 558 and EXPS (with side button interface), the user can easily operate the sight even with the magnifier engaged.

MODEL

# HHS I™

EXPS3-4 WITH A G33 MAGNIFIER

ORDER CODE  
HHS I



The Holographic Hybrid Sight I (HHS I™), featuring an EXPS3-4 with a G33™ magnifier, provides a solution for engaging threats in Close Quarters Combat situations and then quickly to 600-meter targets. Instant transition is achieved through a Switch-To-Side (STS) mount that offers a simple and quick disengagement of the magnifier. This durable, night vision-compatible system offers wide field optical performance for visibility in extreme low-light conditions.

Aiming dots may not be distinguishable without magnification.



4

RETICLE

MSRP \$1,209

BLACK

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	MAGNIFICATION FIXED	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
7.7" x 2.3" x 3.3" (195.6 x 59 x 83.9 mm)	22.4 oz (635.1 g)	To 33 ft. (10 m)	Black	1" Weaver or MIL-STD-1913 rail	3X	30 settings (10 NV settings)	1 x 123 lithium battery	1,000 continuous hrs at nominal setting 12	68 MOA ring w/ (4) 1 MOA dots




MODEL  
**HHS III™**

518-2 WITH A G33™ MAGNIFIER

ORDER CODE  
HHS III



Complementing the Holographic Hybrid Sight (HHS) line up, the HHS III™, featuring a 518-2 with a G33™ magnifier, delivers both close-quarter and long-range shooting capability. The HHS III takes EOTech's top sight features and adds easy-to-find AA battery compatibility. A quick Switch-To-Side (STS) mount allows for fast, simple disengagement of the magnifier.



2

RETICLE

MSRP \$1,089

BLACK

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	MAGNIFICATION FIXED	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
9.5" x 2.3" x 3.3" (241.3 x 58.4 x 83.8 mm)	25 oz (708.8 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	3X	20 settings	2 x AA battery (supports lithium, alkaline or rechargeable)	up to 2,500 continuous hrs (lithium) at nominal setting 12; 2,200 continuous hrs w/AA alkaline date battery life numbers	68 MOA ring w/ single 1 MOA dot


MODEL  
**HHS II™**

EXPS2-2 WITH A G33™ MAGNIFIER

ORDER CODE  
HHS II



Regardless of the scenario, the Holographic Hybrid Sight II (HHS II™), featuring an EXPS2-2 with a G33™ magnifier, provides an amazing advantage when transitioning from close quarter to long-range shooting. Instant transition is achieved through a quick Switch-To-Side (STS) mount that offers a simple, quick disengagement of the magnifier.



2

RETICLE

MSRP \$1,135

BLACK

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	MAGNIFICATION FIXED	BRIGHTNESS	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	RETICLE OPTIONS
7.7" x 2.3" x 3.3" (195.6 x 59 x 83.9 mm)	22.4 oz (635.1 g)	To 10 ft. (3 m)	Black	1" Weaver or MIL-STD-1913 rail	3X	20 settings	1 x 123 lithium battery	1,000 continuous hrs at nominal setting 12	68 MOA ring w/ (2) 1 MOA dots

MODEL  
**G33™**

ORDER CODE  
G33.STS  
G33.STS Tan



The G33™ is one of the most compact and lightweight magnifiers available. The mount provides fast transitioning from 3X to 1X and the optic offers tool-free vertical and horizontal adjustments, larger field-of-view and an adjustable diopter for improved, precise focusing. The G33 works with all EOTech HWS models.

MSRP \$609

BLACK

TAN

L x W x H	WEIGHT	WATER-RESISTANT	COLOR/FINISH	MOUNT	MAGNIFICATION FIXED	EYE-RELIEF	FIELD-OF-VIEW	SEALING
3.9" x 2.2" x 3.3" (99 x 55.9 x 83.9 mm)	11.2 oz (317.5 g)	To 33 ft. (10 m)	Black, Tan	1" Weaver or MIL-STD-1913 rail	3X	2.2" (55.5 mm)	7.3"	Fog-resistant internal optics

EOTECH®

# RETICLE

## HWS® RETICLE ADVANTAGES

HOLOGRAPHIC WEAPON SIGHTS




### VERSATILITY WITH OTHER WEAPON PLATFORMS

With its advanced holographic technology, the HWS 2-dot reticle solves a number of fire control issues for a host of applications and weapon platforms.

LOAD	CENTER DOT FIRST ZERO	CENTER DOT SECOND ZERO	SECOND DOT ZERO	BOTTOM OF CIRCLE
.223 Cal. 62 Gr., 2,900 Vel.	50 YARDS	200 YARDS	500 YARDS	7 YARDS
.44 Mag. 240 Gr., 1,300 Vel.	25 YARDS	50 YARDS	165 YARDS	—
12 Gauge 385 Gr. 1,850 Vel.	25 YARDS	100 YARDS	250 YARDS	—
.50 Cal. Black Powder 350 Gr., 1,850 Vel.	25 YARDS	100 YARDS	250 YARDS	—

### RANGE ESTIMATION WITH UNMAGNIFIED HWS

The standard ring found in most reticles equates to approximately 68" (5'8") at 100 yards.

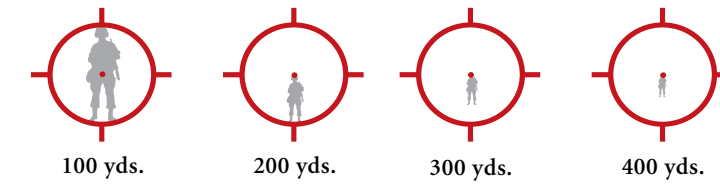

### BRIGHTNESS

With multiple brightness settings, HWS technology offers quick adjustability to accommodate any shooting situation.



DARK

BRIGHT

EOTECH's Holographic technology provides a distinct advantage over typical red dots. EOTECH can offer any type of reticle pattern, as opposed to being limited to a single dot. EOTECH reticle designs are fabricated so that they can incorporate:


- Multiple trajectory points of aim
- Range assist features
- Anti-torque or cant visual indicators

EOTECH® 2018




## RETICLE PATTERNS

EOTECH's reticle patterns greatly impact accuracy and fast target acquisition. Unlike traditional red dot technology, EOTECH's reticle patterns feature a 68 MOA ring surrounding a 1 MOA center dot allowing the shooter to quickly pick up a target.

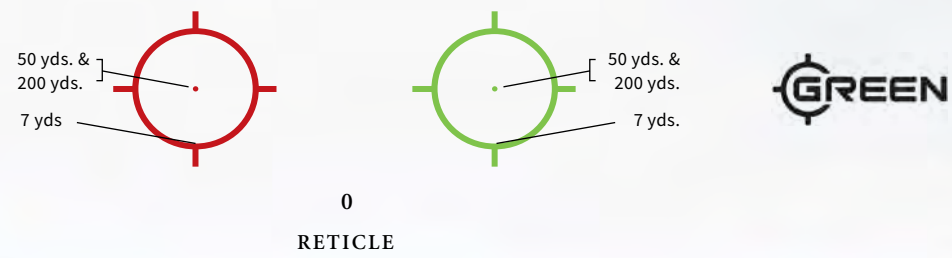


The most popular reticle offered, this 68 MOA ring with 1 MOA dot is ideal for fast target acquisition. It provides three usable aiming points. The aiming points above were based on the following load: .223 Cal. 62 Gr. 2,900 Vel. Other loads and calibers can also be used, but the operator will have to establish the ranges associated with the aiming points. When using a shotgun, the 68 MOA ring can be used to represent shot patterns but will vary based on choke and shell selection.

**For ordering this reticle, the model codes will end in -0.**




The two-dot reticle pattern can be easily distinguished with or without magnification. It provides two usable aiming points for both subsonic or supersonic rounds. Calculated using a 16" barrel and 110 Gr. supersonic and 220 Gr. subsonic ammunition.

**For ordering this reticle, the model codes will end in -2.**

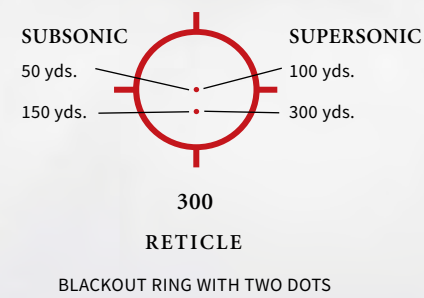

The two-dot reticle pattern in the 300 Blackout model provides two usable aiming points for both subsonic and supersonic rounds. Calculated using a 16" barrel and 110 Gr. supersonic and 220 Gr. subsonic ammunition.

**For ordering this reticle, the model codes will end in -300.**



Use this ballistic reticle with 5.56 Nato/.223 Cal. with 62 Gr. M855 FMJ at roughly 2,680 fps with a 14.5" barrel.

**For ordering this reticle, the model codes will end in -4.**

Note: Aiming dots may not be distinguishable without magnification.



The XR308 reticle was designed specifically for the military M240 machine gun. It was calculated with a .308 Cal. with 150 Gr. M59 FMJ at roughly 2,800 fps with a 24.8" barrel.



The FN303 pattern is designed to be used with FN Herstal's less lethal launcher (.68 Cal.).



The SAGE reticle pattern combines a targeting and ranging reticle in one image. It offers a range-assisted scale. The pattern was specifically developed for use with Sage Control Ordnance single and multiple projectile 37 mm rifled launchers. The multipurpose image is calibrated to the specific trajectory of Sage's KO line of less-lethal impact munitions.

EOTECH®


# THERMAL & NIGHT VISION

## DARKNESS AND EXTREME CONDITIONS

### THERMAL vs. NIGHT VISION

EOTECH is a leader in electro-optical technologies. With decades of experience, we offer the most advanced and reliable night vision (I<sup>2</sup>) and thermal (IR) products on the market. Thermal and night vision equipment has improved greatly over the years. Understanding these advancements is important when deciding between thermal or night vision products.

#### THERMAL IMAGING ATTRIBUTES

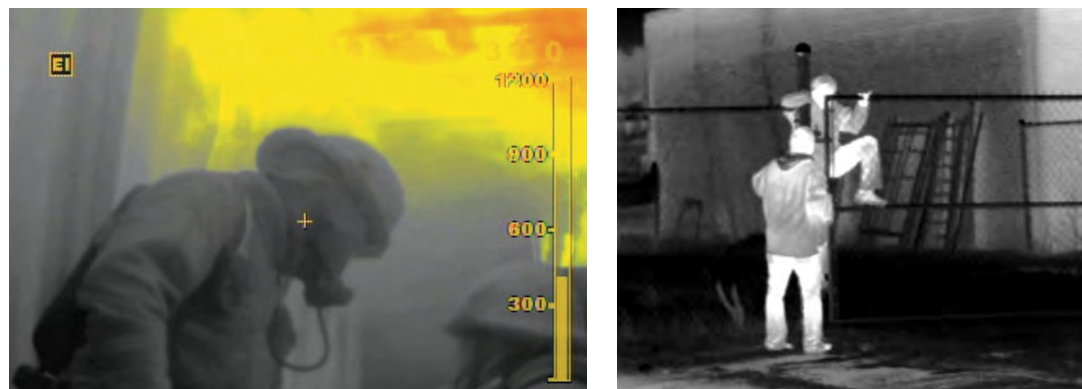

Detects heat signatures by interpreting infrared (IR) light waves of target area


Usable in any light condition (day or night)

Provides visibility through extreme environments (fog, smoke and dense foliage)

Can detect targets out to extreme distances

Superior target detection, but target identifications challenging – difficult to determine friend or foe

#### NIGHT IMAGING ATTRIBUTES

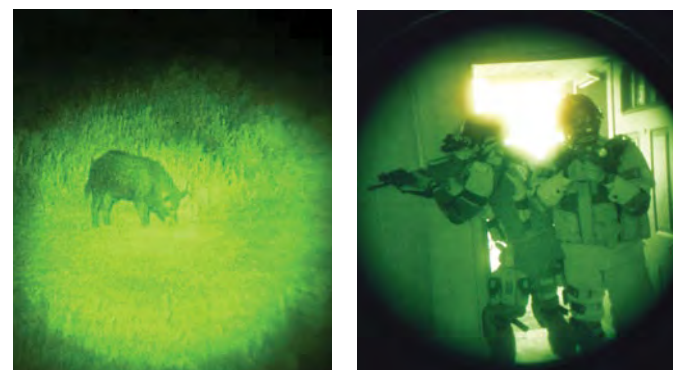

Exceptional target identification, especially at close range

Doesn't function in bright ambient conditions

Will not function in pitch darkness. Needs a small amount of light to operate

EOTECH®

# THERMAL VISION



## MODEL LWTS

LIGHT WEAPON THERMAL SIGHT

ORDER CODE TWB-001-A3



The Light Weapon Thermal Sight (LWTS) is a handheld and clip-on weapon-mounted thermal weapon sight with 640 x 480 resolution. The thermal imaging capability of the LWTS allows for long-wave infrared observation and target identification under adverse conditions, including light rain, smoke, light snow and low light to total darkness.

Call for price

GRAY

L x W x H	WEIGHT	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)	FIELD-OF-VIEW	MAGNIFICATION	FOCUS RANGE	FRAME RANGE	RECOGNITION AFTER DETECTION
6.7" x 3.6" x 3.9" (170.1 x 91.4 x 99 mm)	839.2g (1.85 lb) w/batteries	4 x AA lithium battery	10 hrs@77°F (25°C)	14.8° horizontal	1X with 2X digital zoom	3 m to infinity	30 Hz	> 1400 m clear air

Cleared by DOD/OSR for public release under Ref: 12-S-0138 on November 16, 2011.

This commodity is controlled under the International Traffic in Arms Regulations (ITAR), and may not be exported without proper authorization by the U.S. Department of State.

EOTECH®

# NIGHT VISION



NIGHT VISION

MODEL  
**M914**

NIGHT VISION DEVICE

ORDER CODE  
M914A/PVS-14



The M914 weapon sight is one of the most versatile night vision systems available today. It can be used as a handheld pocket scope, a helmet-mounted monocular, or a weapon sight when mounted in tandem with an infrared laser aimer or other night vision-compatible primary optic, such as an EOTECH HWS. Additional features include a low-battery indicator located in the eyepiece and an active projected infrared LED that provides short-range illumination for activities such as map reading.

Call for price

BLACK

L x W x H	WEIGHT	MOUNT	MAGNIFICATION	FIELD-OF-VIEW	OBJECTIVE LENS	MIN FOCUS DISTANCE	EYE RELIEF	DIOPTRER ADJUSTMENT	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)
4.5" x 2.5" x 2.4" (11.5 x 6.4 x 6.1 cm)	350 g (0.77 lb.) with battery	Head- and helmet-mount adapters and weapon-mount adapter for MIL-STD-1913 rail	1X	40°	1.1" (27 mm)	9.8" (25 cm)	1" (25 mm)	+2 to -6	1 x AA battery	Approx. 48 hrs

EOTECHINC.COM

MODEL  
**M2124**

CLIP-ON NIGHT VISION DEVICE

ORDER CODE  
M2124  
(PVS-24 type)



The M2124 is a rugged, Clip-On Night Vision Device (CNVD) based on the military AN/PVS-24 nomenclature. The advanced design of the M2124 eliminates the typical requirement of removing a primary (day) sighting system since the CNVD mounts in line with a standard day optical sight. Combining day and night vision sights eliminates the need to re-zero, as the primary sight remains undisturbed. Additional advantages to supplementing a primary sighting system with the M2124 include maintaining a user's consistent eye relief and shooting position, as well as retaining user muscle memory. By operating the locking, quick-disconnect, single-throw, lever-mounting system provided, the M2124 easily attaches to a MIL-STD-1913 rail interface system.

The unit can also be used as a handheld observation device.

Compact and  
lightweight

Low-battery indicator and  
battery reverse polarity protection

Call for price

BLACK

L x W x H	WEIGHT	MOUNT	MAGNIFICATION	FIELD-OF-VIEW	MIN FOCUS DISTANCE	DETECTION RANGE	DIOPTRER	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)
Call factory for details	794 g (1.75 lb.) with battery	MIL-STD-1913 rail	1X	13°	27.3 yds. (25 m)	546.8 yds. (500 m)	N/A	1x123 lithium battery	Approx. 16 hrs.

EOTECH® 2018

MODEL  
**M2124 LR**

CLIP-ON NIGHT VISION DEVICE – LONG RANGE

ORDER CODE  
M2124-LR  
(PVS-24 type)



The M2124LR is a slightly larger version of the M2124 that is optimized to partner with high-powered magnified scopes.


Compact and  
lightweight

Low-battery indicator and  
battery reverse polarity protection

Call for price

TAN

L x W x H	WEIGHT	MOUNT	MAGNIFICATION	FIELD-OF-VIEW	OBJECTIVE LENS	MIN FOCUS DISTANCE	DETECTION RANGE	DIOPTRER	POWER SOURCE	BATTERY LIFE (AT ROOM TEMP.)
Call factory for details	1,025 g (2.25 lbs) with battery	Quick-Disconnect, Single Throw Lever	1X	8°	4.3" (110 mm)	43.8 yds. (40 m)	929.6 yds. (850 m)	N/A	1x123 lithium battery	Approx. 16 hrs.



VUDU / PRECISION RIFLE SCOPES

EOTECH INC.

EOTECH®

vudu™

PRECISION RIFLE SCOPES

# vudu

## PRECISION RIFLE SCOPE FEATURES

The EOTECH line of Vudu™ rifle scopes — where durability, precision and versatility meet. Vudu is engineered and constructed to meet the most rugged demands of the serious precision shooter. Starting from a solid piece of aircraft-grade aluminum and finished with the highest-quality AR coated, high-density (HD) glass and surgically precise turret systems, the Vudu line of rifle scopes lets you deliver that critical shot when it matters most. Many models feature a

first focal plane optic design allowing for quick and accurate target ranging at all magnification levels, and the exceptionally bright illuminated reticle will let you take that shot during the difficult low-light hours of dawn and dusk. Whether you need a premium optic for hunting, or competition, or to meet demands in the line of duty, Vudu scopes will get the job done — period. All this at a more affordable price compared to other high-quality first focal plane scopes.

### THE EOTECH VUDU ADVANTAGE WARRANTY

See page 45 for more details.

### APPLIES TO MOST MODELS



### OPTICAL

XC™ High-Density, low-dispersion glass offers impressive light transmission and scene clarity

Models offered in both First and Second Focal Plane

Glass Etched Reticle — Allows for intricate reticle patterns for outstanding ranging and accuracy

Illuminated Reticle — Improves aiming under low-light conditions

Coated lens

### CONSTRUCTION

Aircraft-grade aluminum single-piece construction

Hard anodized finish

Water-resistant

Fog-resistant

Shock-resistant

Tactical-styled turrets

Laser-etched adjustment indicators

Push-button illumination controls

Single-construction eyepiece

### TURRET

EZ-Click™ turrets

EZ Chek Tactical turrets for quick return to zero





EOTECHINC.COM

MODEL  
**vudu 1-6x24FFP**

ORDER CODE  
VDU1-6FFSR1  
VDU1-6FFSR2  
VDU1-6FFSR3




On/Off and Illumination Buttons




BLACK

Compact, yet fully loaded. This is an optic that feels as much at home on the AR platform as it does on your favorite bolt action rifle. The EOTECH Speed Ring reticle allows for fast target engagement at low power, but at higher power provides the resolution and accuracy required to tackle longer shots. The Vudu 1-6x is the perfect solution for short- to medium-range applications that require the highest level of durability and accuracy.



FOV@1x FOV@6x  
SR-1 (MRAD)



FOV@1x FOV@6x  
SR-2 (7.62 mm BDC)  
SR-3 (5.56 mm BDC)  
(MOA)

MSRP \$1,399

First Focal Plane | Objective Lens Diameter — 24 mm | Single-Piece 30 mm tube | Illuminated Reticle | XC™ High-Density Glass | .5 MOA or .2 MRAD Adjustments

OVERALL LENGTH	WEIGHT w/BATTERIES	ACTUAL MAGNIFICATION	EXIT PUPIL	EYE RELIEF	ACTUAL FIELD-OF-VIEW	FIELD-OF-VIEW (@100 YARDS)	BATTERY TYPE	BATTERY LIFE (AT ROOM TEMP.)	BATTERY LIFE (AT AUTO SHUT-OFF)
270 mm (10.63 in.)	570 g (20.1 oz)	1x - 6x	1x: 11.2 mm (.43 in.); 6x: 2.8 mm (.11 in.)	1x: 91-101 mm; (3.39-4.02 in.); 6x: 90-101 mm (3.46-3.90 in.)	1x: 86-100 mm; (3.39-4.02 in.); 6x: 88-99 mm (3.46-3.90 in.)	1x: 9.2 m (29.5 ft.); 6x: 1.8 m (5.7 ft.)	CR2032	Approx. 500 hrs.	Approx. 2 hrs.

MODEL  
**vudu 2.5-10x44FFP**

ORDER CODE  
VDU2-10FFH59  
VDU2-10FFMD1  
VDU2-10FFMD2




Tactical Turrets




BLACK


Want the perfect medium range precision optic? We've got it! The 2.5-10x Vudu rifle scopes provide the perfect combination of speed and accuracy to tackle those tough shots. The extremely clear XC High-Density glass and first focal plane optical design allow you to range and shoot with the utmost speed and precision. When precision, accuracy, durability and image clarity matter most for your mid-range engagements, the Vudu 2.5-10x is the ideal option.



HORUS H59



MD1-MRAD



MD2-MOA

MSRP starts at \$1,599

First Focal Plane | Objective Lens Diameter — 44 mm | Single-Piece 30 mm tube | Illuminated Reticle | XC™ High-Density Glass | Tactical Turrets w/ EZ Chek™ Zero Stop | .25 MOA or .1 MRAD Adjustments | Sunshade included


OVERALL LENGTH	WEIGHT w/BATTERIES	ACTUAL MAGNIFICATION	EXIT PUPIL	EYE RELIEF	ACTUAL FIELD-OF-VIEW	FIELD-OF-VIEW (@100 YARDS)	BATTERY TYPE	BATTERY LIFE (AT ROOM TEMP.)	BATTERY LIFE (AT AUTO SHUT-OFF)
357 mm (14.06 in.)	770 g (27.2 oz)	2.5x - 10x	2.5x: 11.2 mm (.43 in.); 10x: 2.8 mm (.11 in.)	2.5x: 91-101 mm; (3.39-4.02 in.); 10x: 90-101 mm (3.46-3.90 in.)	2.5x: 86-100 mm; (3.39-4.02 in.); 10x: 88-99 mm (3.46-3.90 in.)	2.5x: 9.2 m (29.5 ft.); 18x: 1.8 m (5.7 ft.)	CR2032	Approx. 500 hrs.	Approx. 2 hrs.

These commodities are controlled under the Export Administration Regulations (EAR) and may not be exported without proper authorization by the U.S. Department of Commerce.


MODEL  
**vudu 3.5-18x50FFP**




ORDER CODE  
VDU3-18FFH59  
VDU3-18FFMD1  
VDU3-18FFMD2



HORUS H59



MD1-MRAD



MD2-MOA

Parallax Adjustment



The Vudu 3.5-18x provides a robust 34 mm tube, XC High-Density glass, and is loaded with other performance features required to take that precise long-range shot. The oversized and precision-machined turrets, with EZ Chek Zero Stop feature, lets you quickly dial adjustments and return to zero, even in low-light conditions. The side-mounted parallax adjustment allows you to easily dial-in the reticle focus for the most difficult long-range shots.

MSRP starts at \$1,799

BLACK


First Focal Plane | Objective Lens Diameter — 50 mm | Single-Piece 34 mm tube | Illuminated Reticle | XC™ High-Density Glass | Tactical Turrets w/ EZ Chek™ Zero Stop | .25 MOA or .1 MRAD Adjustments | Sunshade included | Parallax Adjustment

OVERALL LENGTH	WEIGHT w/BATTERIES	ACTUAL MAGNIFICATION	EXIT PUPIL	EYE RELIEF	ACTUAL FIELD-OF-VIEW	FIELD-OF-VIEW (@100 YARDS)	BATTERY TYPE	BATTERY LIFE (AT ROOM TEMP.)	BATTERY LIFE (AT AUTO SHUT-OFF)
377 mm (14.841 in.)	952 g (33.6 oz)	3.5x - 18x	3.5x: 11.2 mm (.43 in.); 18x: 2.8 mm (.11 in.)	3.5x: 91-101 mm; (3.39-4.02 in.); 18x: 90-101 mm (3.46-3.90 in.)	3.5x: 86-100 mm; (3.39-4.02 in.); 18x: 88-99 mm (3.46-3.90 in.)	3.5x: 9.2 m (29.5 ft.); 18x: 1.8 m (5.7 ft.)	CR2032	Approx. 500 hrs.	Approx. 2 hrs.


MODEL  
**vudu 5-25x50FFP**




ORDER CODE  
VDU5-25FFH59  
VDU5-25FFMD3



HORUS H59



MD3@25x



MD3@5x

NEW  
2018

Parallax Adjustment



The New Vudu 5-25 x 50 mm is ideal for short platform rifles. At approximately 11.2 inches in length, the 5-25x is one of the shortest first focal plane rifle scopes on the market. The elevation turret includes a push/pull locking system and EOTECH's EZ Chek Zero Stop allowing for quick adjustments and return to zero. One unique advantage of the short design is that it provides the ability to attach either a clip-on night vision or thermal device in front of the scope and still allow the user to make adjustments to the device without leaving the scope.

MSRP starts at \$2,099

BLACK

First Focal Plane | Objective Lens Diameter — 50 mm | Single-Piece 34 mm tube | Illuminated Reticle | XC™ High-Density Glass | 0.1 MRAD Adjustments | Sunshade included | Parallax Adjustment | Elevation Turret Lock | Capped Windage Turret

OVERALL LENGTH	WEIGHT w/BATTERIES	ACTUAL MAGNIFICATION	EXIT PUPIL	EYE RELIEF	ACTUAL FIELD-OF-VIEW	FIELD-OF-VIEW (@100 YARDS)	BATTERY TYPE	BATTERY LIFE (AT ROOM TEMP.)	BATTERY LIFE (AT AUTO SHUT-OFF)
285 mm (11.2 in.)	835 g (29.5 oz)	5x - 25x	5x: 5.5 mm (.22 in); 25x: 2.1 mm (.08 in)	5x: 75-94 mm (2.96-3.71 in); 25x: 83-92 mm (3.27-3.63 in)	5x: 4.45 degrees 25x: 0.88 degrees	5x: 7.1 m (23.3 ft) 25x: 1.43 (4.7 ft)	CR2032	Approx. 500 hrs.	Approx. 2 hrs.

VUDU / PRECISION RIFLE SCOPES


EOTECH® 2018

MODEL

**vudu 3.5-18x50SFP**



ORDER CODE  
VDU3-18SFHC1



HC1

Parallax Adjustment



The Vudu 3.5-18x Second Focal Plane scope is the ideal scope for medium- and long- range shooting. It features EOTECH's XC™ High-Density glass, rugged 34 mm tube and easy-to-use tactical turrets equipped with covers to prevent inadvertent adjustments. Other features include a side-mounted parallax adjustment, illuminated reticle and removable throw lever for quick magnification adjustments.

MSRP \$1,599

BLACK

Second Focal Plane | Objective Lens Diameter — 50 mm | Single-Piece 34 mm tube | Illuminated Reticle | XC™ High-Density Glass | .25 MOA Adjustments | Sunshade included | Parallax Adjustment | Capped Turrets


OVERALL LENGTH	WEIGHT w/BATTERIES	ACTUAL MAGNIFICATION	EXIT PUPIL	EYE RELIEF	ACTUAL FIELD-OF-VIEW	FIELD-OF-VIEW (@100 YARDS)	BATTERY TYPE	BATTERY LIFE (AT ROOM TEMP.)	BATTERY LIFE (AT AUTO SHUT-OFF)
377 mm (14.841 in.)	878 g (31 oz)	3.5x - 18x	3.5x: 10.9 mm (.43 in.); 18x: 2.8 mm (.11 in.)	3.5x: 86-100 mm; (3.39-4.02 in.); 18x: 88-99 mm (3.46-3.90 in.)	3.5x: 86-100 mm; (3.39-4.02 in.); 18x: 88-99 mm (3.46-3.90 in.)	3.5x: 9.2 m (30.2 ft.); 18x: 1.8 m (5.9 ft.)	CR2032	Approx. 500 hrs.	Approx. 2 hrs.

MODEL

**vudu 8-32x50SFP**




ORDER CODE  
VDU8-32SFHC2



HC2

Capped, competition turrets



EOTECH's 8-32x50 mm Vudu scope is ideal for competitive and recreational long range shooting. It features competitive turrets with large, easy-to-read minute of angle adjustments. The turrets are calibrated in .125 MOA (1/8" per click) offering extreme precision and accuracy. A side-mounted parallax adjustment allows you to focus the reticle to the target and the XC High-Density glass provides great detail at extreme distances.

MSRP \$1,799

BLACK

Second Focal Plane | Objective Lens Diameter — 50 mm | Single-Piece 34 mm tube | Capped Competition Turrets | XC™ High-Density Glass | .125 MOA Adjustments | Sunshade included | Parallax Adjustment | Capped Turrets

OVERALL LENGTH	WEIGHT w/BATTERIES	ACTUAL MAGNIFICATION	EXIT PUPIL	EYE RELIEF	ACTUAL FIELD-OF-VIEW	FIELD-OF-VIEW (@100 YARDS)
385 mm (15.16 in.)	926 g (32.7 oz)	8x - 32x	8x: 5.3 mm (.21 in.); 32x: 1.6 mm (.06 in.)	8x: 86-98 mm (3.39-3.86 in.); 32x: 89-98 mm (3.50-3.86 in.)	8x: 2.53 degrees; 32x: 0.63 degrees	8x: 4.0 m (13.2 ft.); 32x: 1.0 m (3.3 ft.)

EOTECH PRS  
**MOUNTS**

ORDER CODE  
MN2007 MN2008  
MN2009 MN2010  
MN2011 MN2012  
MN2013 MN2014  
MN2015 MN2016



**2-PIECE RINGS**

Low Ring Mount (21 mm)    Medium Ring Mount (25 mm)    High Ring Mount (30 mm)    Ultra-High Ring Mount (37 mm)

**CANTILEVER MOUNT**

(30 mm / 34 mm)

A great way to compliment your new rifle scope is with EOTECH's high-quality 2-piece rings or cantilever mount. Precision CNC machined out of aircraft grade aluminum, the ring mounts are offered in both 30 mm and 34 mm in low (21 mm), medium (25 mm), high (30 mm), and ultra-high (37 mm) and sold (2) rings per package. The Cantilever mount includes an adjustable, locking quick-detach lever for easy removal and attachment along with a 2-inch offset that positions the scope in a forward position, providing the correct eye relief and cheek placement for most AR15/AR10 platforms.

MSRP \$65 (2-PIECE RINGS) / \$195 (CANTILEVER MOUNT)

BLACK

PART No.	PART No.	PART No.	PART No.	PART No.
MN2007 PRS Ring Mount - 30 mm x 21 mm (Low)	MN2009 PRS Ring Mount - 30 mm x 30 mm (High)	MN2011 PRS Ring Mount - 34 mm x 21 mm (Low)	MN2013 PRS Ring Mount - 34 mm x 30 mm (High)	MN2015 PRS 2" Cantilever Mount - 30 mm
MN2008 PRS Ring Mount - 30 mm x 25 mm (Med)	MN2010 PRS Ring Mount - 30 mm x 37 mm (Ultra-High)	MN2012 PRS Ring Mount - 34 mm x 25 mm (Med)	MN2014 PRS Ring Mount - 34 mm x 37 mm (Ultra-High)	MN2016 PRS 2" Cantilever Mount - 34 mm

These commodities are controlled under the Export Administration Regulations (EAR) and may not be exported without proper authorization by the U.S. Department of Commerce.

**EOTECH DISCLAIMERS**

ALL EOTECH MATERIALS ARE FOR INFORMATIONAL PURPOSES ONLY AND DO NOT CONSTITUTE ANY BINDING OBLIGATIONS OR AGREEMENT BY EOTECH. ALL CLAIMS ABOUT PERFORMANCE AND PERFORMANCE CHARACTERISTICS ASSUME NORMAL, RESPONSIBLE USAGE WITHIN THE WARRANTY PERIOD.

EOTECH RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECIFICATIONS AT ANY TIME WITHOUT NOTICE.

EOTECH USERS WILL OFTEN EXPERIENCE A POINT OF IMPACT SHIFT AWAY FROM THE POINT OF AIM WHEN THE SIGHT IS USED AT A TEMPERATURE DIFFERENT FROM THE TEMPERATURE AT WHICH THE SIGHT WAS ZEROED.

THE POINT OF AIM SHIFT MAY BE GREATER THE MORE EXTREME THE TEMPERATURE CHANGE. BASED ON TESTING OF SIGHTS IN 2016, THE TYPICAL SHIFT WILL BE BETWEEN APPROXIMATELY 1.4 MOA AND 1.8 MOA. DUE TO MANUFACTURING VARIATIONS, HOWEVER, A PARTICULAR SIGHT HAS THE POTENTIAL TO SHIFT A MAXIMUM OF APPROXIMATELY 3.5 MOA AT -4 °F AND 122 °F. TO ACHIEVE OPTIMUM ACCURACY, THE SIGHT SHOULD BE ZEROED WHENEVER THE TEMPERATURE CHANGES FROM THE TEMPERATURE AT WHICH THE SIGHT WAS ZEROED.

ALL EOTECH SIGHTS EXHIBIT A VARYING DEGREE OF PARALLAX DEPENDING ON OPERATING CONDITIONS.

PATENTS - ONE OR MORE OF THESE PRODUCTS MAY BE COVERED BY ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,374,986; 5,400,540; 5,430,967; 6,185,854; 6,190,025; 6,574,901; 7,493,722; D522,031; D568,508 AND D595,439.

THIS DOCUMENT CONSISTS OF GENERAL CAPABILITIES INFORMATION THAT IS NOT DEFINED AS CONTROLLED TECHNICAL DATA UNDER ITAR PART 120.10 OR EAR PART 772.

**EOTECH INC.**

1201 EAST ELLSWORTH ROAD, ANN ARBOR, MI 48108  
888.EOTHOLO (888.368.4656)

WHERE TO BUY

VISIT US AT  
[WWW.EOTECHINC.COM](http://WWW.EOTECHINC.COM)

U.S. MILITARY INQUIRIES  
866.509.2044

LAW ENFORCEMENT INQUIRIES  
[publicsafety.eotech@L3T.com](mailto:publicsafety.eotech@L3T.com)

**NEW**  
2018

**THE EOTECH PRESTIGE WARRANTY**

Thank you for choosing EOTECH for your new purchase. We understand your passion for shooting and your reliance on products that will provide years of dependable use. That is why we offer a 10-year limited EOTECH Prestige Warranty\* as described below. Should you experience a problem with your EOTECH product, we will do the following to make it right for you.

With the EOTECH Prestige Warranty, we warrant that your Holographic Weapon Sight or Magnifier product will be free from manufacturing defects in material and workmanship (including electronics) under normal use for a period of ten (10) years from the later of (i)

customer's proof of the first purchase of the new product from an authorized commercial seller of EOTECH products or from EOTECH directly, or (ii) manufacturer's date/serial number (as specified on the product). EOTECH will, free of charge and as determined by EOTECH, either repair or replace your product with a comparable product for the first five (5) years. From five (5) to ten (10) years, EOTECH will, at the customer's request, evaluate and repair any and all defects in material and workmanship for a seventy-nine dollar (\$79.00 USD) bench fee. This warranty extends to subsequent owners to the remaining extent of the original owner's warranty. We do this because we want you to be as confident in your purchase as we are in the quality of our product.

**THIS WARRANTY DOES NOT APPLY TO THE FOLLOWING:**

Theft, loss, neglect, or vandalism.	Abuse, misuse, improper installation and modification, alterations, abnormal use, or accidents not resulting from a defect in material and workmanship under normal use of the product.	Cosmetic damage that does not affect the product's use, operation or performance.	Any defect or damage caused by repairs or services not performed by EOTECH.	Vudu riflescopes; Laser Battery Caps (LBC); or L3 Insight branded products.
-------------------------------------	---	---	---	---

EOTECH products to be repaired under this warranty, must have a valid return material authorization (RMA) number; purchasers may obtain this number by submitting a Return Authorization Request Online at [www.eotechinc.com/raform.php](http://www.eotechinc.com/raform.php). If you do not have access to a computer, you may call EOTECH for assistance. Products that arrive at EOTECH without a valid Return Authorization Number will be returned to sender without service.

Once you receive the RMA number, send the product, postage prepaid, to EOTECH. All product(s) must be fully insured and have the correct postage; EOTECH will not be responsible for improper postage or missing/damaged merchandise during shipment. International repairs may include additional shipping and handling charges.

THE WARRANTY PROVIDED HEREIN SHALL BE THE SOLE AND EXCLUSIVE WARRANTY. THERE SHALL BE NO OTHER WARRANTIES EXPRESS OR IMPLIED INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER OBLIGATION ON THE PART OF EOTECH WITH RESPECT TO THIS WARRANTY. THIS WARRANTY DOES NOT AFFECT ANY STATUTORY WARRANTY RIGHTS THE CONSUMER MAY HAVE AGAINST THE SELLER OF THIS PRODUCT. EOTECH SHALL HAVE NO LIABILITY FOR ANY DAMAGES OR FUTILE EXPENSES OF WHATEVER NATURE (WHETHER DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL, SPECIAL OR OTHER DAMAGES) UNDER THIS WARRANTY. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS THAT VARY FROM JURISDICTION TO JURISDICTION. SOME JURISDICTIONS DO NOT ALLOW EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE EXCLUSIONS OR LIMITATIONS MAY NOT APPLY TO YOU.

\* This warranty applies to new purchases of Holographic Weapon Sight or Magnifier products and retroactively applies to Holographic Weapon Sight or Magnifier products sold in 2017 by an authorized commercial seller of EOTECH products or from EOTECH directly.

**THE EOTECH VUDU ADVANTAGE WARRANTY**

Thank you for choosing EOTECH for your new Vudu riflescope purchase. We understand your passion for the sport and your reliance on products that will provide years of dependable use. Should you experience a problem with your new Vudu riflescope, we will do the following to make it right for you.

determined by EOTECH, with a comparable product, free of charge (except for electronic components of an illuminated riflescope, which are addressed below). We do this because we want you to be as confident in your purchase as we are in the quality of our product.

With this limited lifetime EOTECH Advantage Warranty, we warrant that the manufacture and use of your Vudu riflescope will be free of defects in materials and workmanship, regardless of whether you are the original owner. Should your Vudu riflescope ever experience any defects in materials or workmanship, we will repair or replace it, as

The electronic components of a Vudu illuminated riflescope have a full two year warranty from the date of purchase (proof of purchase required). If, during the two year warranty period, these components are found to have any defects in materials or workmanship, EOTECH will repair or replace it, as determined by EOTECH, with a comparable product, free of charge.

**THIS WARRANTY DOES NOT APPLY TO THE FOLLOWING:**

Theft, loss, neglect, or vandalism.	Abuse, misuse, improper installation and modification, alterations, abnormal use, or accidents.	Cosmetic damage that does not affect the product's use, operation or performance, as determined by EOTECH.	Any defect or damage caused by repairs or services not performed by EOTECH.	EOTECH products not in the Vudu line of riflescopes.
-------------------------------------	---	--	---	--

THE WARRANTY PROVIDED HEREIN SHALL BE THE SOLE AND EXCLUSIVE WARRANTY. THERE SHALL BE NO OTHER WARRANTIES EXPRESS OR IMPLIED INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER OBLIGATION ON THE PART OF EOTECH WITH RESPECT TO VUDU RIFLESCOPES COVERED BY THIS WARRANTY. EOTECH SHALL HAVE NO LIABILITY FOR ANY INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES.

