# USING THE MINIMED™ 670G SYSTEM

Instructions for the Experienced MiniMed<sup>™</sup> 630G System User



This is a supplemental guide. For complete instructions and safety information, please see your MiniMed 670G System User Guide.

# USING THE MINIMED 670G SYSTEM: INSTRUCTIONS FOR THE EXPERIENCED USER

# Checklist for starting on your MiniMed 670G pump and CGM system

✓ MiniMed 670G System –Manual Mode & Auto Mode*	2
✓ Getting Started with Manual Mode	3
✓ MiniMed 670G Pump Menus	4
✓ New CGM features in the MiniMed 670G system	5
✓ Retrieve your MiniMed 630G insulin pump settings	7
✓ Connecting your meter to your MiniMed 670G pump	9
✓ Connecting your transmitter to your MiniMed 670G pump	10
✓ Programming your MiniMed 670G pump	11
✓ Changing the reservoir & infusion set	15
✓ Inserting & starting your sensor	16
✓ Calibraton	17
✓ CGM graph & new sensor alerts	18
✓ Before beginning Auto Mode	19
✓ Additional Handout	
✓ Carel ink™ Personal Software Quick Reference Guide	20

# MINIMED 670G SYSTEM -MANUAL MODE & AUTO MODE

WELCOME to the next advancement in diabetes care. Your new MiniMed 670G system includes SmartGuard™ HCL technology, which has features designed to help and protect you.

One of the SmartGuard technology features of this system is called Auto Mode, which automatically adjusts insulin delivery based on your sensor glucose readings.

This booklet will teach you the basics of using your pump in Manual Mode before Auto Mode begins.

Your MiniMed 670G system can be used in two different ways—Manual Mode and Auto Mode.

# **Manual Mode**

Using your pump in a traditional way, like your MiniMed 630G pump.

- Basal rates are pre-programmed.
- Bolusing can be done with the Bolus Wizard<sup>™</sup> or with Manual Boluses.
- CGM is not required for insulin delivery, but is necessary for insulin suspend features.

#### **HOME SCREEN IN MANUAL MODE**





# **Auto Mode**

Delivers basal insulin automatically based on your sensor glucose readings.


- Basal is automatically adjusted every 5 minutes.
- Bolusing for carbs before meals is necessary, but Auto Mode auto adjusts the basal after the bolus is given.
- CGM is required.

#### HOME SCREEN IN AUTO MODE



# **MINIMED 670G PUMP BUTTONS**

# HOME SCREEN WITHOUT CGM

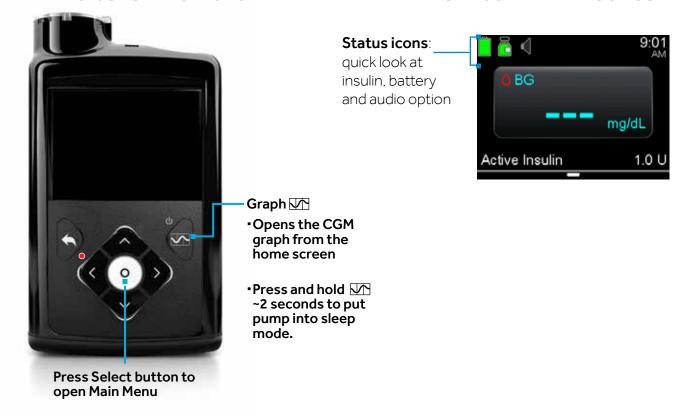

# Let's get started with these steps



1. Charge your Guardian™ Link 3 transmitter



2. Insert a battery




3. Complete the Startup Wizard

Here are some of the menu highlights and important features.

Press **Select** to open the Menu.

#### **MENU**




- **Basal** and **Bolus** options are now on the Menu
- You will now select Status to see your status screens

#### **OPTIONS**



- High Setup and Low Setup are now entered in SmartGuard NEW: Auto Mode Setup
- Basal and Bolus Setup now in **Delivery Settings** (formerly Insulin Settings)
- New location for Reservoir & Tubing

#### **UTILITIES**

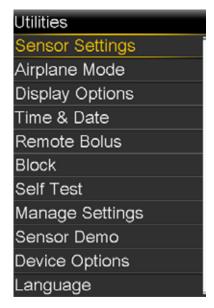


 The sensor feature is turned ON in Sensor Settings

# The sensor, transmitter, and tape

The new sensor, the Guardian Sensor 3, offers improved accuracy with more consistency. It is also our smallest sensor with an 80% reduction in volume over the Enlite sensor for more comfortable wear.

The new transmitter, the Guardian Link 3 Transmitter, has an intelligent chip inside, which monitors your sensors' health.

The new tape has a different shape for easier handling.



# **New CGM features in Manual Mode**

# 1 Expanded Low Limit range


- Your Low limit can be set as low as 50 mg/dL and up to 90 mg/dL.
- This is available in both Manual Mode and Auto Mode.

#### Low limit....


Amanda sets her Low limit at 70 mg/dL. So whether her pump is in Manual Mode or Auto Mode, she is comfortable knowing she will get an **Alert on low** if she reaches 70 mg/dL.

# **2** Fixed Low Alert

- Your system has a fixed low alert if your SG reaches or falls below 50 mg/dL. This alert cannot be changed, but the alert can be cleared.
- This occurs in both Manual Mode & Auto Mode.




# 3 Suspend before low event



To help keep sensor glucose (SG) from reaching your low limit, insulin delivery will be stopped if SG is:

- At or within 70 mg/dL above the low limit.
- Predicted to be approaching the low limit in 30 minutes.





If you want your pump to suspend without alarming, turn **Alert before low** off. However, your pump will alert you if your glucose continues to fall and reaches your low limit.


Note: Your MiniMed 670G has both SmartGuard features — Suspend before low and Suspend on low. You can use either feature, but not both at the same time of the day.

# Suspend before low....

Sam uses **Suspend before low** when his pump is in Manual Mode. Plus, he keeps his **Alert before low** OFF — he doesn't want to be alerted before his glucose is low.

If Sam starts to feel symptoms of low blood glucose while **Suspend before low** is active, he tests his BG. If his BG is not low, but he would like to eat, Sam knows he can resume insulin delivery, and bolus for the carbs he eats

4 Automatic basal resume based on sensor glucose (SG) value



During **Suspend before low** or **Suspend on low**, basal insulin will automatically resume if:

- Glucose is above the low limit and trending upward.
- Insulin has been suspended for at least 30 minutes.



Note: Basal insulin can be manually resumed at any time, and will resume after a maximum of 2 hours.

# RETRIEVE YOUR MINIMED 630G INSULIN PUMP SETTINGS FROM CARELINK™ SOFTWARE

- \*\*If you don't have access to CareLink<sup>™</sup> software, move to the next page to record your pump's settings.\*\*
- 1. Upload your MiniMed 630G pump into CareLink at www.medtronicdiabetes.com/CareLink




For complete instructions on how to upload, go to page 20.

2. Go to **Reports**, find **Report for my pump settings**. Click **+** and click **Generate Reports**.

# CareLink Personal This palls inclinates the June 1 Act of the Committee of

# **DEVICE SETTINGS SNAPSHOT**

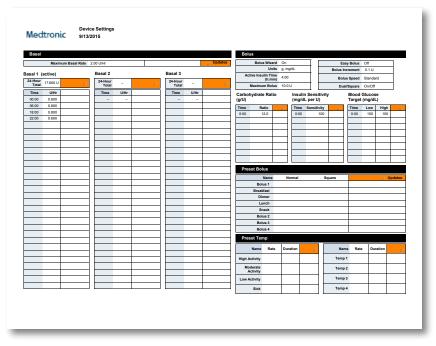


3. If you have any difficulty using CareLink Personal, call the Medtronic 24 Hour HelpLine at 1-818-576-5400


INSULIN SETTIN *BOLUS WIZARD SE				SETTINGS (conti	nued)		
Menu > Insulin Settings > Bolus Wizard Setup			<b>Dual:</b> □ On □ Off <b>Square:</b> □ On □ Off				
Bolus Wizard:	n 🗆 Off		PRESET BOLUS SETUP				
Carb Ratio:				sulin Settings > Pre	set Boius Setup		
12:00 A	g/U						
	g/U		%	Now Squa	re Duration hr		
	g/U		% Now Square Duration hr <b>BOLUS INCREMENT:</b> □ 0.025U □ 0.05U □ 0.1U				
Insulin Sensitivity I					50 🗆 0.050 🗆 0.10		
	mg/dL per U		_	AL/BOLUS:	ay Dalyar III		
	mg/dL per U				ax Bolus:U		
	mg/dL per U				Step SizeU		
BG Target:			AUTO SU	SPEND: 🗆 On	hr □Off		
	mg/dL		BOLUS SI	PEED: Standard	Standard 🗆 Quick		
	mg/dL						
	mg/dL		REMIND				
Active Insulin Time	<b>::</b> hr		Menu > Re				
			PERSONA		ime:AM / PM		
*BASAL PATTERN S							
Menu > Insulin Sett	ings > Basal Pattern Setu	p		G CHECK: $\square$ On $\square$	Off		
Basal 1:	1: Basal Pattern Name:		_	MISSED MEAL BOLUS:			
	U/hr 12:00 A		Meal 1:	AM / PM	AM / PM		
	U/hr		<b>LOW RESERVOIR:</b> ☐ Units: U ☐ Time: hr				
	U/hr						
	U/hr		SET CHAI				
	U/hr	U/nr					
PRESET TEMP SET	TID		☐ Ondays ☐ Off				
	-	,	UTILITIE	S			
Menu > Insulin Settings > Preset Temp Setup Preset Temp Name:			Menu > Utilities				
Type Perce	ont 0/ Duration		DISPLAY	OPTIONS:			
Type Percent% Durationhr		[ ] [	Brightness 🗆 Auto Backlight sec/min				
* The most impor	rtant settings for use wit	h tha	REMOTE BOLUS:   On   Off				
MiniMed 670G	9	II LIIC					
Millimed 0700	system.			**CARB UNIT: Grams Exchanges **Minimed 670G system uses Grams only			
SENSOR SETTIN	GS: LOW SETTINGS M	enu > Sens	or Settings >	1			
Time Period	Low Limit	Alert bef	fore Low	Suspend on Low	Alert on Low		
12:00 A	mg/dL		□ On	□On	□On		
			 □ On	□On	□On		
				-			
	mg/dL		□ On	□On	□On		
Low Snooze:	minutes						
SENSOR SETTIN	GS: HIGH SETTINGS M	lenu > Sens	sor Settinas :	> Hiah Settinas			
Time Period	High Limit		fore High	Alert on High	Rise Alert		
1		7.1101.000		7.11.01.0 011 1 11.g.1	+		
12.00	7.11						
12:00 A	mg/dL	L On _	min	□On	or 1   11   111		
					□Onmg/dL/min		
	mg/dL	On	min	□On	or 1   11   111		
					□Onmg/dL/min		
_	mg/dL	$\square \cap \square$	min	□On	or 1   11   111		
			111111				
High Snooze:	minutes						


# Delete Old Pump and Connect New Pump to Your CONTOUR® NEXT LINK 2.4 Meter\*

- 1. Hold the Menu button until the meter turns on.
- 2. Scroll to **Setup** and click on OK.
- Click OK.
- Click Connection.
- Click **Delete**.
- Click **Yes** to delete pump.
- 7. Wait...
- Click **OK**.
- Click OK.
- 10. Click Yes.
- 11. Click OK.
- 12. Press Auto Connect.

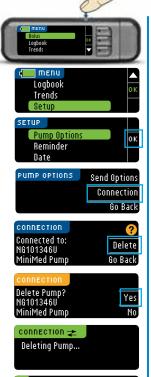







Device Options

# Put the meter down and pick up your pump.

- 13. Press **O**.
- 14. Go to **Options**.
- 15 Go to **Utilities**
- 16. Go to **Device Options**.
- 17. Select Connect Device.
- 18. Select Auto Connect on your pump.



- 19. Press ∨.
- 20. Press >.







# Place the meter and pump next to each other.

22. Select **Search** on your pump and meter. The search may take up to 2 minutes.



- 23. Check to see that the Device SN (serial number) on the pump screen matches the Device SN on the meter.
- 24. If they match, select Confirm on the pump.
- 25. Check to see that the SN on the back of the pump matches the SN now on the meter screen.
  - MiniMed Pump Next connected: AA1234567B

Confirm Device SN

Cancel Confirm

Use Pump to confirm Device

New Device

SN BGJ133333F

26. Follow the remaining steps on the meter to choose to Always send result to pump, to select the **Date Format**, set **AutoLog** to Off, and accept the Target Range.

Setup is now complete.

<sup>\*</sup>Use your meter that you received with your MiniMed 630G system.

# To Wirelessly Connect Your Pump and Transmitter

- 1. Make sure the transmitter is on your charger.
- 2. Press O.
- 3. Select Options.
- 4. Select Utilities.
- 5. Select **Device Options**.
- 6. Select Connect Device.












- 8. Press ∨.
- 9. Select Continue.





- 10. Remove the transmitter from the charger.
- 11. When the green light flashes on the transmitter, immediately hit Search on the pump.
  - The search can take several minutes...
  - If the green light on the transmitter does not flash, put the transmitter back on the charger and try to Search again.





12. When the device is found, confirm that the serial number (SN) shown on the pump is the serial number on the back of your transmitter.

If you receive the **No devices found** message, place the transmitter back onto the charger. Then remove the transmitter from the charger and immediately select **Retry** on the pump.

Medtronic
Guardian™ Link(3)
REF MMT-7811

SN GTJ133333F

IC: XXXXXXXXX

IC: XXXXXXXXX

IC: XXXXXXXXX

XXXXXXXX

Cancel Confirm

13. If SN matches, select Confirm.

Connection is now complete. The transmitter serial number will be displayed on the pump screen.

Program your MiniMed 670G pump and CGM settings.

#### Max Basal

This is set to 2.0 U/hr. You may need to change it if you have a basal rate that is more than 2 U/hr, or if your healthcare professional wants to limit your Max Basal for safety.

- 1. From the Home screen, press O.
- 2. Select Basal or Options.
- 3. Select **Delivery Settings**.
- 4. Select Max Basal/Bolus.
- 5 Select **Max Basal**
- Read the message.
   Press > and select
   Continue
- 7. Press O.
- 8. Press ^ or ∨ to enter number of U/hr and press ○.
- 9. Select Save.









# Add a Basal Pattern

- 1. From the Home screen, press O.
- 2 Select **Basal**



3. Select **Delivery Settings**.



4. Select Basal Pattern Setup.



Basal Pattern Setup

Add New

Basal 1

Edit Basal 1

12:00 A 12:00 A


- 5. Select Basal 1.
- 6. Select **Options**.
- 7. Select Edit.
- 8. Press O to enter the End time. If you have only one basal rate, press O.

If you have more than one basal rate, press ^ or v to



 Press ^ or ∨ to enter U/hr of your basal rate and press ○.

> Continue entering your End times and U/hr until all basal rates are entered



Done

10. Select Done.



11. Review basal rates. Select **Save**.



# **Bolus Wizard Setup**

- 1. From the Home screen, press O.
- 2. Select **Options**.
- Select **Delivery Settings**.
- 4. Select **Bolus Estimate** Setup.
- Select Bolus Wizard to turn on.
- 6. Press ∨ to continue reading text.
- 7 Select **Next**
- 8. Review the description of Carb Ratio and select Next
- 9 Press O on the time seament.
- 10. If you have only one Carb Ratio, press O.

If you have more than one Carb Ratio, press ∧ or ∨ to enter the time that your Carb Ratio ends and the second begins and press O.

11. Press ∧ or ∨ to enter the **q/U** of your Carb Ratio and press O.

> If you have more than one Carb Ratio, continue by

entering your time segments and Carb Ratios until all are entered

- 12. Select Next.
- 13. Review the description of Sensitivity Factor and select Next.
- 14. Press on the time segment.
- 15. If you have only one Sensitivity Factor, press O.


If you have more than one Sensitivity Factor, press ∧ or ∨ to enter the time that your Sensitivity Factor ends and the second begins and press O.











Sensitivity 2/4 (Sensitivity) is the BG amount educed by T unit of insulin



16. Press ∧ or ∨ to enter the mg/dL per U of your Sensitivity Factor and

> If you have more than one Sensitivity Factor, continue by entering your time segments and Sensitivity Factors until all are entered.

Edit Sensitivity 2/4

12:00 A 12:00 A

BG Target 3/4

BG Target is the value your blood glucose level will be corrected to.

Edit BG Target 3/4 Start End Lo-Hi (mg/dL)

12:00 A 12:00 A ----


End mg/dL per U

- 17. Select Next.
- 18. Review the description of BG Target and select Next.
- 19. Press O on the time seament.
- 20. If you have only one BG Target Range, press O.

If you have more than one BG Target Range, press ∧ or ∨ to enter the time that your BG Target Range ends and the second begins and press ○. Press ^ or ∨ to enter the **Lo** target and press O.

21. Press ^ or v to enter the **Hi** target and press O. If you have more than one BG Target Range, continue by entering your time segments and Lo

and Hi targets until all are entered.



- 22. Select **Next**.
- 23. Review the description of Active Insulin Time and select **Next**
- 24. Select **Duration**.
- 25. Press ∧ or ∨ to enter the **Duration** of your Active Insulin Time and press O.
- 26. Select Save.

The Bolus Wizard setup is now complete.



# **Max Bolus**

This is set to 10 units. You may need to change it if you give boluses that are more than 10 units, or if your healthcare professional wants to limit your Max Bolus for safety.

- 1. From the Home screen, press O.
- 2. Select **Options**.
- 3. Select **Delivery Settings**.
- 4. Select Max Basal/Bolus.
- 5. Select Max Bolus.



- 6. Read the message. Press > and select **Continue**.
- 7. Press O.
- 8. Press ^ or v to enter number of units and press O.
- 9. Select Save.



Delivery Settings

Preset Temp Setup








**NOTE**: Program any additional insulin setting features you want to transfer over to your MiniMed 670G pump.

# **Turn the Sensor Feature On**

- 1. Press O.
- 2. Select Options.
- 3. Select **Utilities**.
- 4. Select **Sensor Settings**.



5. Select **Sensor** to turn the feature **On**.



Now go back to the Home screen, and the next pages

will help you setup your CGM settings.

# **High Setup**

- 1. Press O.
- 2. Select Options.
- 3. Select SmartGuard.
- 4. Select **High Setup**.
- 5. Press O. If you are setting only one time segment, press O.

If you are setting multiple segments with different high limits, press ^ to set the first End time and press O.

- 6. Press ^ or ∨ to set **Hi limit** and press ○.
- 7. Press to continue onto the next screen.
- 8. Select each feature you wish to turn on.
- 9. Once settings are selected, select **Next**.
- 10. Select Done.


If setting multiple time segments, select the **End time**, **Hi**, and features you wish to turn on. Then select **Done**.


11. Verify settings are correct, and select **Save**.



















# **Low Setup**

- 1. Press O.
- 2. Select Options.
- 3. Select SmartGuard.
- 4. Select **Low Setup**.



If you are setting multiple segments with different low limits, press ^ to set the first End time and press O.

- 6. Press ^ or ∨ to set Lo limit and press ○.
- 7. Press to continue onto the next screen.
- 8. Select each feature you wish to turn on.
- Once settings are selected, select Next.
- 10. Select Done.

If setting multiple time segments, select the **End time**, **Lo**, and features you wish to turn on. Then select **Done**.

11. Verify settings are correct, and select **Save**.

















# Changing the Reservoir and Infusion Set

The MiniMed 670G pump uses the same infusion sets and reservoirs as your MiniMed 630G pump. Changing your reservoir and infusion set is the same as your MiniMed 630G pump.

- 1. From the Home screen, press O.
- 2. Select **Options**.



3. Select Reservoir & Tubing.




4. Select **New Reservoir**.



5. Continue with the remaining steps for filling your reservoir and inserting a new infusion set.

# **Inserting Your Sensor**

The sensor insertion process for MiniMed 670G pump is very similar to the MiniMed 630G pump, just with new over tape. See your CGM Getting Started Guide page 20 for the full steps.

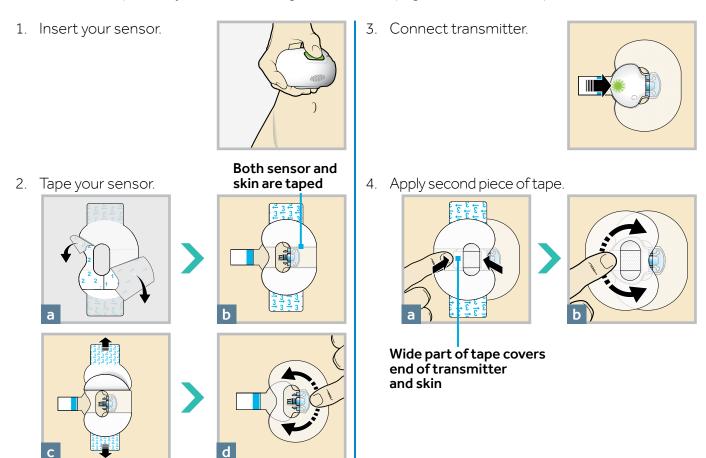


# Starting the Sensor

Make sure your pump is on the Home screen so the Sensor connected message appears. This typically take less than a minute, but can take up to 10 minutes.

- 1 Select **Start New Sensor**
- 2. The **Sensor warm-up started** message appears.
- 3. Press ∨ and then to clear.
- 4. **Warm up**... appears on the Home screen until sensor is ready for first calibration.

**Warm up** can last between 40 minutes and up to 2 hours.

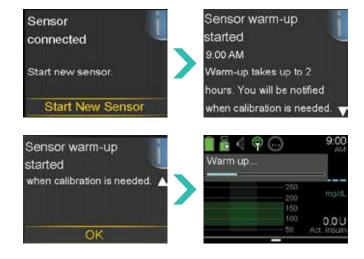

The CGM calibration schedule is similar to your MiniMed 630G system. Calibrate 3-4 times a day or when you receive a Calibrate now.

# After inserting a new sensor, calibrate:

- After Warm up.
  - Warm up can vary from 40 minutes up to 2 hours.
  - Your pump will alert you with a **Calibrate now** when it's ready.
- Again within 6 hours (first day only).
- Again every 12 hours (at a minimum).
- When the system detects that a calibration is needed for optimal performance.

# Calibrating the Sensor

- 1. Within two hours after starting a new sensor, or any other time a calibration is necessary, you will receive a Calibrate now. If you plan to snooze or test BG right away, select **Snooze**.
- 2. Once you select **Snooze**, **Calibration required** will appear on the Home screen until you enter a BG or test with your linked meter.
- 3. Select **Yes** to confirm the BG meter reading. If you do not believe the meter result is accurate, do not confirm now. Select **No**, wash your hands, and re-test your BG.
- 4. Select **Calibrate Sensor** to calibrate using the BG value. If you plan to give a bolus, it's best to calibrate first, then select **Bolus** on your pump screen.



Done

Calibrating 3-4 times

a day is recommended

for optimal sensor


accuracy and performance.

# **CALIBRATION TIPS**

- ✓ Spread your calibrations throughout the day, such as before meals, and before bedtime
- Calibrate before bedtime to minimize getting Calibrate now alerts while you sleep
- ✓ It is not recommended to calibrate when glucose values are changing rapidly, like following a meal or physical exercise
- ✓ Always calibrate immediately after testing your BG
- Do not calibrate your sensor using alternate site testing or a control solution test\*

# To access your CGM graphs

From the Home screen, press 🗐 .

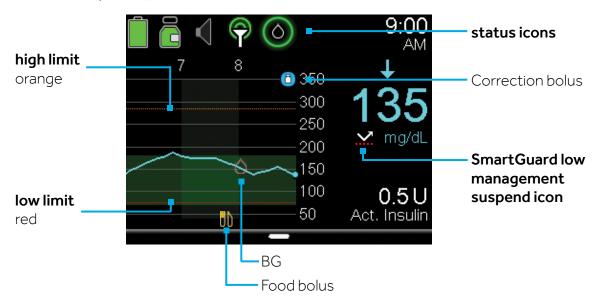

# **CGM Status Icons**

# **Connection icons**



Sensor connected



Sensor not connected

# Calibrations icons



Cal required



Time until Next Cal is unavailable



Sensor is not ready for calibration

# SmartGuard low management suspend icons — when either Suspend before low or Suspend on low is set to ON.



(Flashing) Suspend before low or Suspend on low is active



Suspend before low or Suspend on low is on but unavailable e.g., no SGs available

NEW SENSOR ALERTS					
ALERT	REASON	STEPS TO TAKE			
Sensor updating	The sensor is updating	Do not calibrate unless notified. This could take up to 3 hours.			
Calibration not accepted	Your system was unable to use the BG you entered to calibrate your sensor	In 15 minutes, your pump will prompt you to enter a new BG for calibration. Wash hands before checking.			

#### When to start on Auto Mode

You and your healthcare professional will decide when the time is right to start Auto Mode.





Auto Mode will shift the way you manage your diabetes. One of the biggest benefits will be having fewer clinical decisions to make, as the system will adjust insulin delivery every 5 minutes to help keep more of your glucoses in range. However, you will still have important responsibilities.


Are you Auto Mode ready? You should:

- enter carbs into the pump before you eat.
- check BGs and calibrate 3-4 times a day.
- respond promptly to alerts.
- upload to CareLink.

# CareLink Software — upload your MiniMed 670G pump prior to Auto Mode start.

- Allows your health care provider to evaluate your settings and identify any issues that need to be corrected.
- www.medtronicdiabetes.com/CareLink







**IMPORTANT** Do not turn on Auto Mode before your training. If you do, Auto Mode could activate in the night before you are ready. Auto Mode requires a 48+ hour warm-up period before activating.

# WHAT IS CARELINK™ PERSONAL SOFTWARE?

Carelink Personal software allows you to collect information from your insulin pump, continuous glucose monitoring (CGM) device, and blood glucose meter to evaluate your glucose control through a free, secure, web-based software. These reports can be used during office visits to discuss therapy changes with your healthcare professional. You can also monitor your progress to improved glucose management.

#### WHAT DO I NEED TO START?

All it takes to get started is an easy upload using the CONTOUR®NEXT LINK blood glucose meter or the CareLink USB provided with your Medtronic pump or CGM.

#### **SIGN UP IS EASY**

Before using for the first time, you need to set up a user account and password. Go to: http://medtronicdiabetes.com/carelink

# TO CREATE AN ACCOUNT, START AT THE WELCOME SCREEN & FOLLOW THESE EASY STEPS:



1 From the Welcome screen, click the **Sign Up Now** button and select language.



- After you accept the terms of agreement, you'll be asked to **create a username and password**. The password can be any combination of letters or numbers from 8 to 32 characters long and include one uppercase letter, one number, and one special character. Passwords are case-sensitive.
  - Note: If you forget your password, click on **Forgot your password?** on the home page of CareLink Personal.




Enter your **personal information** in all the required fields. You will be asked to follow through the reCAPTCHA feature of enrollment on the bottom of the screen. Check the box and click **Submit**. Once you have registered, you can log in from the Welcome screen using your new username and password.

**MAC USERS** Follow the steps to install the software and begin uploading your pump with instructions on the next page once logged into the CareLink Personal software website.


# **BROWSER SETUP BEFORE UPLOAD:**

FOR WINDOWS 7, 8, 8.1, AND 10, YOU WILL NEED ADMINISTRATOR RIGHTS.

#### Windows 7

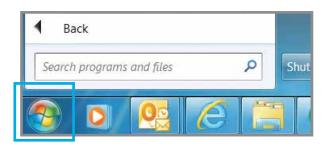

Be sure all open windows in Internet Explorer are closed.

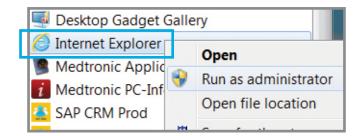


2 Open your **Start Menu** and click on **All Programs** RIGHT-CLICK on your **Internet Explorer icon** and select **Run as Administrator**. Click **Allow** in the User Account Control window.

# Windows 8 or Windows 8.1



2 Open your **Start Menu** and click on **All Programs** RIGHT-CLICK on your **Internet Explorer icon** and select **Run as Administrator**. Click **Allow** in the User Account Control window.

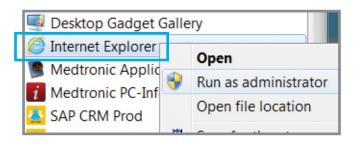


Open your **Start Menu** and click on **All Programs** RIGHT-CLICK on your **Internet Explorer icon** and select **Run as Administrator**. Click **Allow** in the User Account Control window.

#### Windows 10



- 1 From your Start menu on your desktop, go to All Apps, then Windows Accessories.
- 2 RIGHT-CLICK on **Internet Explorer** in the menu list. Select **Run as Administrator**. Click **Allow** or **Yes** in the User Account Control window.


# **UPLOADING DATA FROM YOUR DEVICE**

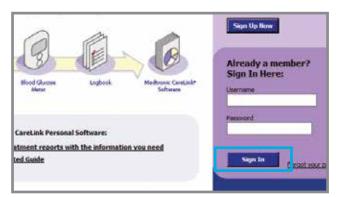


Go to http://medtronicdiabetes.com/carelink, enter your Username and Password, and click on Sign In.



2 DO NOT CONNECT your CONTOUR®NEXT LINK or CareLink USB to the computer until prompted. Click on Upload Data from My Device. Allow the Java Plug-in to load.

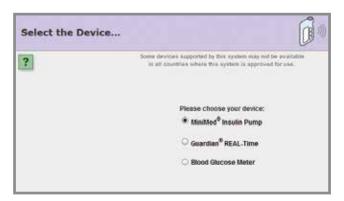

The Choose device and select MiniMed™ Insulin Pump and click Next. The Check Pump Status... screen will appear, then click Next.

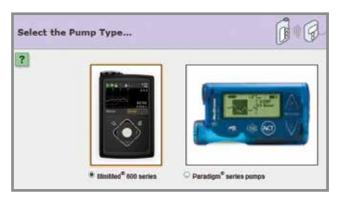

4 Select your pump type. For the MiniMed<sup>™</sup> 670G pump, select **MiniMed 600 series**.

# **UPLOADING DATA FROM YOUR DEVICE (CONTINUED)**



5 Enter your pump's serial number as instructed on the **Identify the pump** screen.



6 Choose the correct **USB linking device** you are using. Most commonly, it will be your CONTOUR®NEXT LINK meter. Click **Next** to continue.



7 **CONNECT** your USB linking device to your computer. The **Verify Connections** screen will appear to confirm communication between your devices and inform you when setup is complete. Click **Finish** to continue.



A progress window will then be displayed.
The amount of time it takes to upload your data will depend on how much data needs to be uploaded. When the upload completes successfully, you are now able to view your reports.

#### **STILL HAVE QUESTIONS?**

Please call our 24-Hour HelpLine at 1.800.646.4633, option 1.

For a list of supported operating systems please see:

# http://www.medtronicdiabetes.com/support/carelink-personal

 $Please\ visit\ www.medtronic diabetes.com\ for\ detailed\ product\ and\ important\ safety\ information.$ 

# Medtronic

18000 Devonshire Street Northridge, CA 91325 USA 1.800.646.4633